

## NEC MultiSync® EA273WMi LCD 27" Enterprise Display

### Datasheet



**The NEC MultiSync® EA273WMi features an extremely thin 27" IPS LED backlight panel with a resolution of 1920 x 1080 which results in an ultra-modern and slim design.** Ambient Light and Human Sensors enforce the sustainable product concept while offering improved ergonomics with 130 mm height adjustability. The ergonomic performance of this display is further enhanced by the relatively large dot pitch for easy text readability, which complements the excellent IPS image quality. Finally, the display offers future-proof connectivity with four inputs: DisplayPort, DVI-D, HDMI and D-Sub.

Ideal for the corporate office that values personal productivity, demands stylish products and insists on the best future proof technology.

### Benefits

**Ergonomic Office** – full height adjustability (130 mm), swivel, tilt and pivot functionality ensures perfect individual ergonomic set-up.

**Feature Set for Perfect Office Use** – Integrated Speakers, headphone jack and USB Hub provide excellent options for office communication.

**Ambient Light Sensor** – with Auto Brightness function always sets optimised brightness level according to ambient light and content conditions.

**Green Product Concept** – Eco Mode and Carbon Footprint Meter / Carbon Savings Meter, Ambient Light Sensor.

**Easy Control** – of up to six displays in a multi-monitor configuration with ControlSync® technology.

## Product Information

Product Name	NEC MultiSync® EA273WMi
Product Group	LCD 27" Enterprise Display
Order Code	60003608 (BK), 60003607 (WH)

## Display

Panel Technology	IPS TFT with W-LED backlight
Screen Size [inch/cm]	27 / 69
Screen Aspect Ratio	16:9
Pixel Pitch [mm]	0.311
Brightness (typ.) [cd/m²]	250
Contrast Ratio (typ.)	1000:1 (25000:1 dynamic contrast ratio)
Viewing Angle [°]	178 horizontal / 178 vertical (typ. at contrast ratio 10:1)
Response Time (typ.) [ms]	6
Colours [Mio.]	16.77

## Synchronisation Rate

Horizontal Frequency [kHz]	31.5 - 83
Vertical Frequency [Hz]	56 - 75

## Resolution

Optimum Resolution	1920 x 1080 at 60 Hz			
Supported	1920 x 1080; 1600 x 1200;	1280 x 1024; 1152 x 864;	1024 x 768; 832 x 624;	800 x 600; 640 x 480

## Connectivity

Digital	1 x DisplayPort; 1 x DVI-D (with HDCP); 1 x HDMI; USB ver. 2.0 (1 down / 4 up)
Analog	1 x mini D-sub 15 pin

## Electrical

Power Consumption on Mode [W]	16 (Eco Mode); 27 (typ.); 31 (max.)
Power Savings Mode [W]	< 0.5
Power Supply	0.85 A/0.45 A; 100-120 V/220-0 V; internal power supply

## Environmental Conditions

Operating Temperature [°C]	+5 to +35
Operating Humidity [%]	20 to 80

## Ergonomics

Height adjustable stand [mm]	130
Screen Tilt / Swivel [°]	-5 to 30; -170 to +170
Screen Rotate [°]	0 to 90 (landscape to portrait mode)

## Mechanical


Dimensions (W x H x D) [mm]	639.3 x 418 x 230
Weight [kg]	8.7
VESA Mounting [mm]	100 x 100

## Additional Features

Special Characteristics	Ambient light sensor for optimized brightness levels; Auto Contrast; Carbon Footprint Meter; Carbon Savings Meter; ControlSync®; Customize Setting; DICOM simulation; EcoModes; ErgoDesign®: Height adjustable stand (130 mm) with 90° Pivot features; Human Sensor; LED Backlight Technology; USB ver. 2.0 (4 down / 1 up); Versatile and easy installation (VESA standard) with NaViSet and NaViKey; Windows 8 compatible
Colour Versions	Black Front Bezel, Black Back Cabinet; White Front Bezel, White Back Cabinet
Cable Management	yes
Kensington security slot	yes
Plug and Play	DDC2B/2Bi; EDID Standard; VESA DDC/CI
Audio	1W + 1W (De-activateable); Headphone Jack
Adjust Functions	Audio Volume / Lock-Out; Auto Adjust; Brightness; Colour Temperature Control; Contrast; Control Sync; DV Mode; EcoMode; Fine Adjust (analog); Human Sensing; Intelligent Power Management; Language Select; Monitor Information; NTAA (Non-Touch-Auto-Adjustment); On-Screen-Display (OSD) lock-out; One Touch Recovery; Power-Off Timer; sRGB
Shipping Content	Control Sync Cable; DisplayPort cable; Monitor; Power Cable; Setup Guide; USB Cable
Safety and Ergonomics	CE; EnergyStar 6.0; ErP; FCC Class B; ISO 9241-307 (pixel failure class I); MPR II/ MPR III; PCT/ Gost; RoHS; TCO 6.0; TÜV Ergonomics; TÜV GS; UL/C-UL or CSA
Warranty	3 years warranty incl. backlight; optional 4th to 5th year warranty extension

## Green Features

Energy Efficiency	Ambient light sensor; Annual energy consumption: 39 kWh (based on 4 operating hours per day); Carbon Footprint Meter / Carbon Savings Meter; ECOMode; Energy efficiency class: A; Human sensor
Ecological Materials	Efficient mechanical design for minimised packaging; Minimal use of harmful material
Ecological Standards	ErP compliant; TCO 6.0; TCO edge

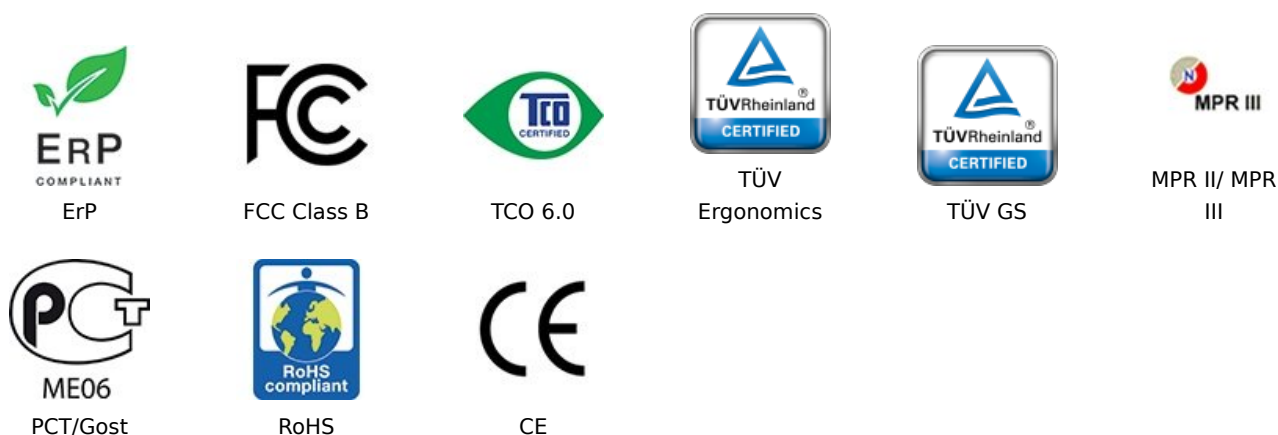

This document is © 2021 Sharp NEC Display Solutions Europe GmbH.

All rights reserved in favour of their respective owners. All hardware and software names are brand names and/or registered trademarks of the respective manufacturers. All specifications are subject to change without notice. Errors and omissions are excepted. 05.10.2021